


# WIRELESS DATA TRANSFER DIGITAL TORQUE WRENCHES



- Wireless data transfer to computer
- Unit: N.m, in.lb, ft.lb, kg.cm
- Clockwise and counter-clockwise operation
- Peak and track working mode
- Can set tolerance with judgement in peak working mode
- 9 target torque values can be set, with audible and visible alarm:
  - Green LED light on and buzzer sounds when torque value is 80%~99.5% of target torque
  - Both green and red LED light on and buzzer sounds when torque value is over 99.5% of target torque
- Power off in 2 minutes automatically
- Non-slip grip handle
- With damp record
- With overload record (once the torque reaches 110% of the maximum range)

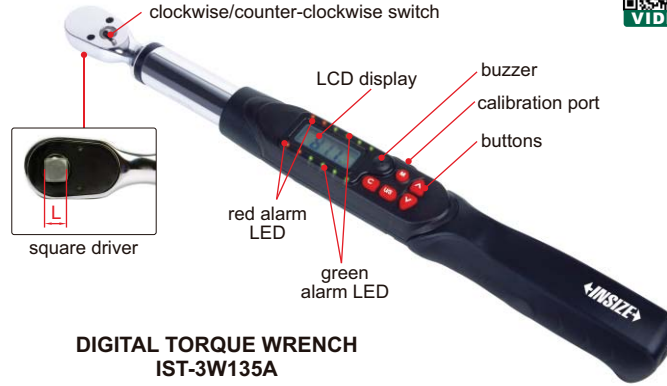


**DIGITAL TORQUE WRENCH  
IST-3W135A**



**RECEIVER  
IST-3WREC**



up to 10pcs torque wrench can be connected to one receiver, the maximum working distance is 300m

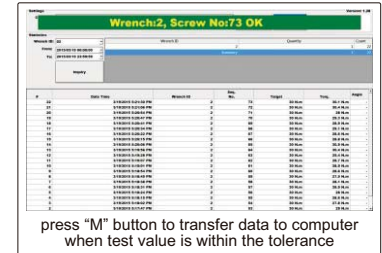

press "M" button to transfer data to computer when test value is within the tolerance

## DIGITAL TORQUE WRENCH SPECIFICATION

Code	IST-3W30A	IST-3W135A	IST-3W200A	IST-3W340A	IST-3W1200A	IST-3W1500A	IST-3W2000A
Range	6~30N.m	27~135N.m	40~200N.m	68~340N.m	240~1200N.m	300~1500N.m	400~2000N.m
Accuracy	clockwise	±2%			±2.5%		
	counter-clockwise	±3%			±3.5%		
Tolerance setting range	-25% ~ +25% (target torque value)						
Resolution	0.01N.m	0.1N.m	0.1N.m	0.1N.m	1N.m	1N.m	1N.m
Square driver (L)	1/4"	3/8"	1/2"	1/2"	1"	1"	1"
Working frequency	ISM433MHz (432.0~433.8MHz, adjustable)						
Power supply	2xAA batteries, for 110 hours working						
Length	390mm	415mm	530mm	650mm	1800mm	1800mm	1800mm
Weight	760g	940g	1340g	1540g	13000g	13000g	14000g

## RECEIVER SPECIFICATION

Code	IST-3WREC
Working frequency	ISM433MHz (432.0~433.8MHz adjustable)
Power supply	DC 24V, 0.5A
Dimension	200×108×31mm
Weight	500g

## OPTIONAL ACCESSORY

Calibration cable	IST-SD-CABLE
-------------------	--------------