

# DIGITAL TUBULAR INSIDE MICROMETERS


**IP65**  
WATERPROOF

**DATA**  
OUTPUT



**3521-1000**

- Carbide measuring faces
- Graduation: 0.001mm/0.00005"
- Accuracy:  $(3+n+L/50)\mu\text{m}$   
 n= number of rods  
 L=maximum measuring length (mm)
- The diameter of extension rods is 22mm
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Supplied with setting standards
- Optional accessory: data output cable (code **7306-30A**, **7302-SPC6**, **7305-SPC3A**, **7305-B01**)

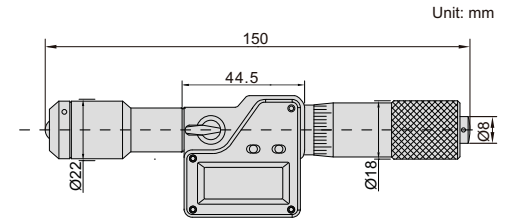

Code	Range	Travel of micrometer head	Extension rods
<b>3521-175</b>	150-175mm	25mm	—
<b>3521-1000</b>	150-1000mm	25mm	25mm, 50mm (2pcs), 100mm, 200mm, 400mm
<b>3521-1500</b>	150-1500mm	25mm	25mm, 50mm (2pcs), 100mm (2pcs), 200mm, 400mm (2pcs)
<b>3521-2000</b>	150-2000mm	25mm	25mm, 50mm (2pcs), 100mm, 200mm (2pcs), 400mm (3pcs)